



CHANDELLE
CATALOGUE
LUNE BRILLANTE

<https://lunebrillante.sg/>

CHANDELLE CONTENTS

03 - ABOUT US

04 - AT A GLANCE

05 - RECESSED MODULE B DOWNLIGHT

08 - RECESSED MODULE H ROUND

10 - RECESSED MODULE H GRILLE

13 - SURFACE MOUNTED EYEBALL

16 - SURFACE MOUNTED RING

19 - CONIC TRACK LIGHT

22 - VELO TRACK LIGHT

25 - LUXE+ LIGHT

29 - LUXORA INTEGRATED LIGHT

32 - VELAR GLOW LIGHT

35 - LUME ELITE LIGHT

38 - ASTRA TELESCOPIC

41 - NOVA GLIDE LIGHT

44 - LUX INTEGRATED LIGHT


47 - CONTACT US

LUNE BRILLANTE

CONCEPT BEHIND



At Lune Brillante, we bring lighting innovations to life with our sophisticated collections. With over 14 years of experience in architectural lighting for interiors, we are renowned for bespoke solutions tailored to customer needs. Our signature and classic lighting options offer timeless appeal and emotional connections. Beyond our products, we provide end-to-end lighting consultancy, an inspiration gallery, and educational content. Visit our minimalist studio in central Singapore for a curated, immersive shopping experience where your comfort is our priority.

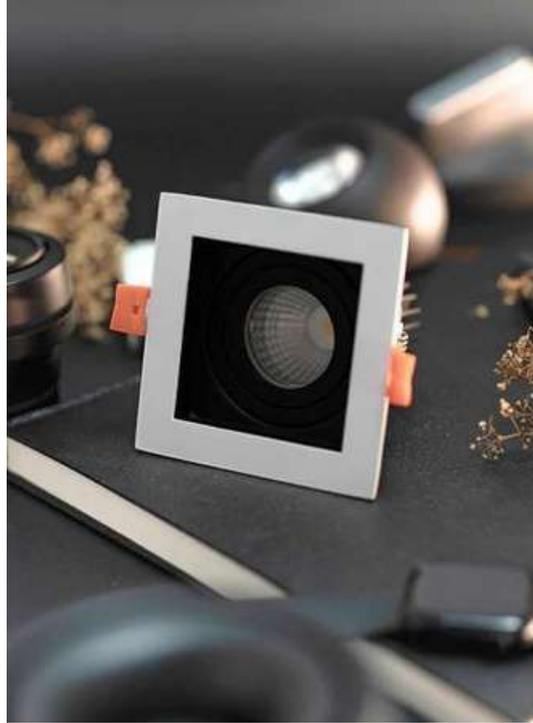

AT A GLANCE



CHANDELLE
MODULE B





MODULE B

The Chandelle LED Adjustable Recessed Downlight features a classic circular design with an interchangeable reflector in multiple colors for a modern touch. Made from high-quality aluminum, it ensures optimal heat dissipation for consistent performance.

With tunable color temperatures, this downlight allows you to create the perfect ambiance and highlight unique interior elements, making it ideal for diverse applications.

MODULE B RING



MODULE B

POWER: 10W
VOLATAGE: AC220-240V
LUMEN: 90-110LM/W
LIGHT COLOUR: DIMMABLE + TUNABLE
BEAM ANGLE: 60°
LED DRIVER: RX TUYA BLUETOOTH MESH DRIVER
MATERIAL: ALUMINIUM
REFLECTOR: BLACK GLOSSY | BLACK MATTE | GOLDEN | MIRROR | SILVER | WHITE
DIMENSION: Ø80 X 100MM
CUTOUT SIZE: Ø85MM




REPLACEABLE COB MODULE

POWER: 10W
VOLATAGE: AC220-240V
LUMEN: 90-110LM/W
LIGHT COLOUR: WARM WHITE, COOL WHITE, DAYLIGHT, TUNABLE WHITE
CCT: DIMMABLE + CCT TUNABLE
LED CHIPSET: PHILIPS COB
DIMENSION: Ø50 X 71MM
IP RATING: IP20 (NON-WATERPROOF)



REFLECTOR COLOURS



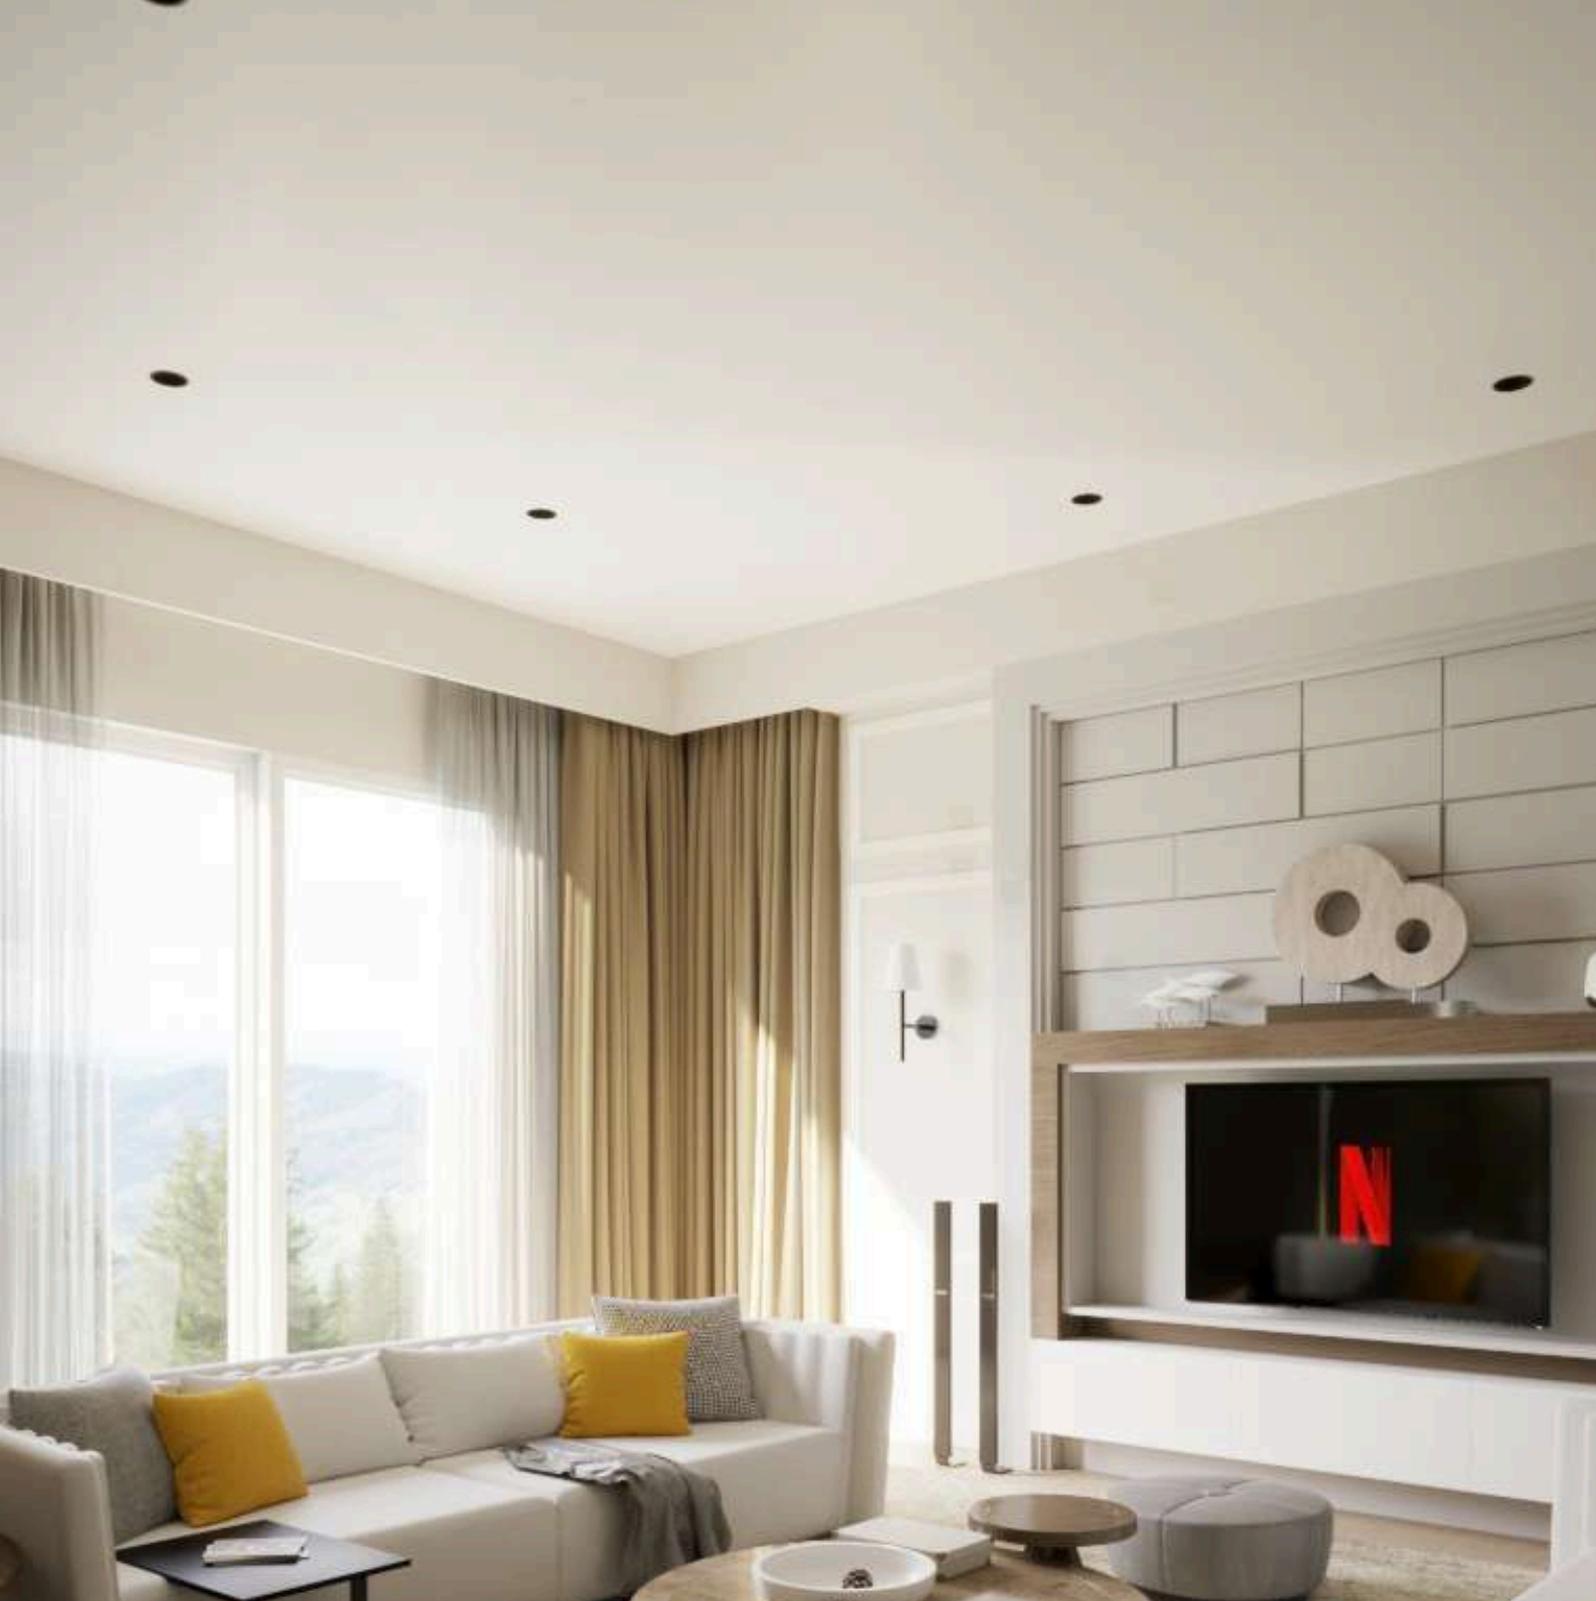

MODULE H

Simple, elegant, and versatile. The contemporary Module H Round Series allows for easy replacement of faulty bulbs without the need to remove the entire housing. Made from lightweight aluminum, these fittings offer excellent light reflectivity, making them ideal for high-performance LED applications.

MODULE H RING



MODULE H

POWER: 10W
VOLATAGE: AC220-240V
LUMEN: 90-110LM/W
CCT: WARMWHITE 2700-3000K, COOLWHITE 4000-4500K, DAYLIGHT 6000-6500K, TUNABLE WHITE 2700-6500K
MATERIAL: ALUMINIUM
HOUSING: WHITE, BLACK
DIMENSION: Ø93 X 100MM
CUTOUT SIZE: Ø85MM
IP RATING: IP20 (NON-WATERPROOF)




REPLACEABLE COB MODULE

POWER: 10W
VOLATAGE: AC220-240V
LUMEN: 90-110LM/W
LIGHT COLOUR: WARM WHITE, COOL WHITE, DAYLIGHT, TUNABLE WHITE
CCT: DIMMABLE + CCT TUNABLE
LED CHIPSET: PHILIPS COB
DIMENSION: Ø50 X 71MM
IP RATING: IP20 (NON-WATERPROOF)



CHANDELLE
HGRILLE

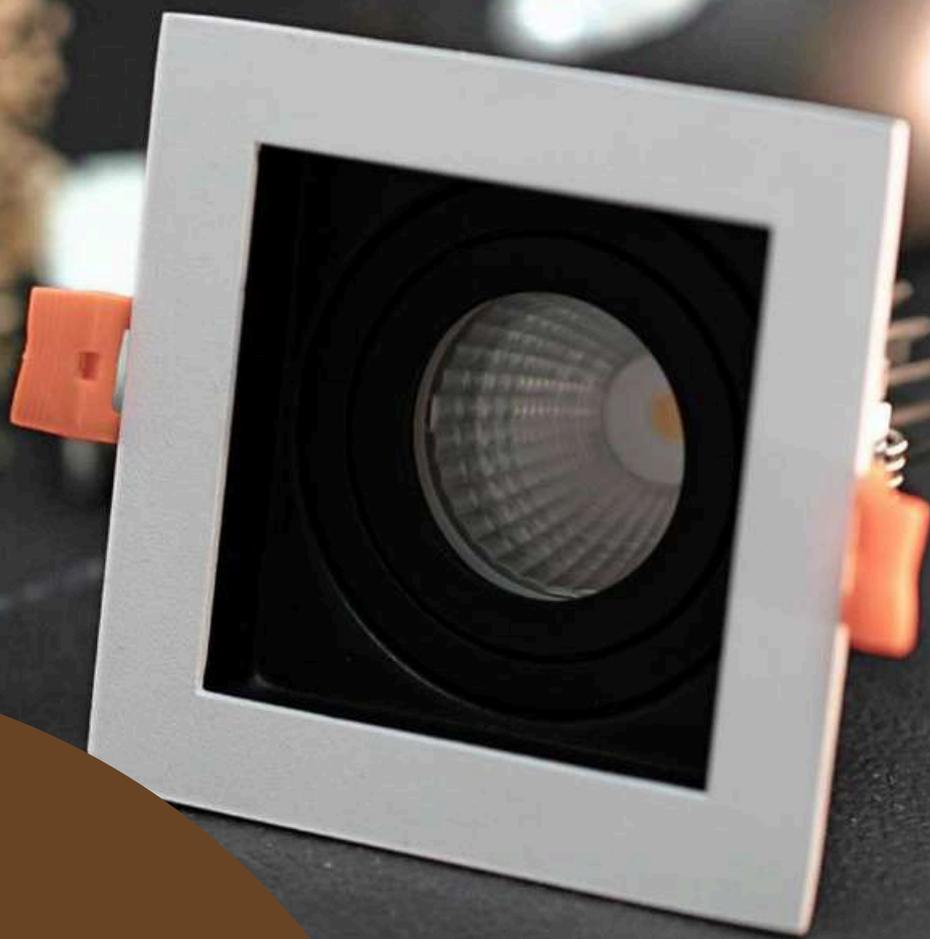



H GRILLE

The Chandelle LED Recessed Replaceable Adjustable Module H Series is a basic modular light that provides a reliable and consistent lighting design.

From the simple Single to the heavy-duty Triple, users can find functionality in varying sizes to cater to their lighting preferences. The lightweight aluminum material has a visible light reflectivity and dissipates heat which makes it a great reflector LED light fittings.

MODULE H GRILLE



SPECIFICATIONS

MATERIAL: ALUMINIUM

REFLECTOR:

BLACK GLOSSY | BLACK MATTE | GOLDEN | MIRROR | SILVER | WHITE

HOUSING: WHITE FRAME AND BLACK INNER

SINGLE HEAD

DIMENSION: Ø100 X 100 X 100MM

CUTOUT SIZE: Ø90 X 90MM

DOUBLE HEAD

DIMENSION: Ø185 X 100 X 100MM

CUTOUT SIZE: Ø175 X 90MM

TRIPLE HEAD

DIMENSION: Ø270 X 100 X 100MM

CUTOUT SIZE: Ø260 X 90MM

REPLACEABLE COB MODULE

POWER: 10W

VOLATAGE: AC220-240V

LUMEN: 90-110LM/W

LIGHT COLOUR: WARM WHITE, COOL WHITE, DAYLIGHT, TUNABLE WHITE

CCT: DIMMABLE + CCT TUNABLE

LED CHIPSET: PHILIPS COB

DIMENSION: Ø50 X 71MM


IP RATING: IP20 (NON-WATERPROOF)



SIGNATURE COLLECTION

CHANDELLE
EYEBALL



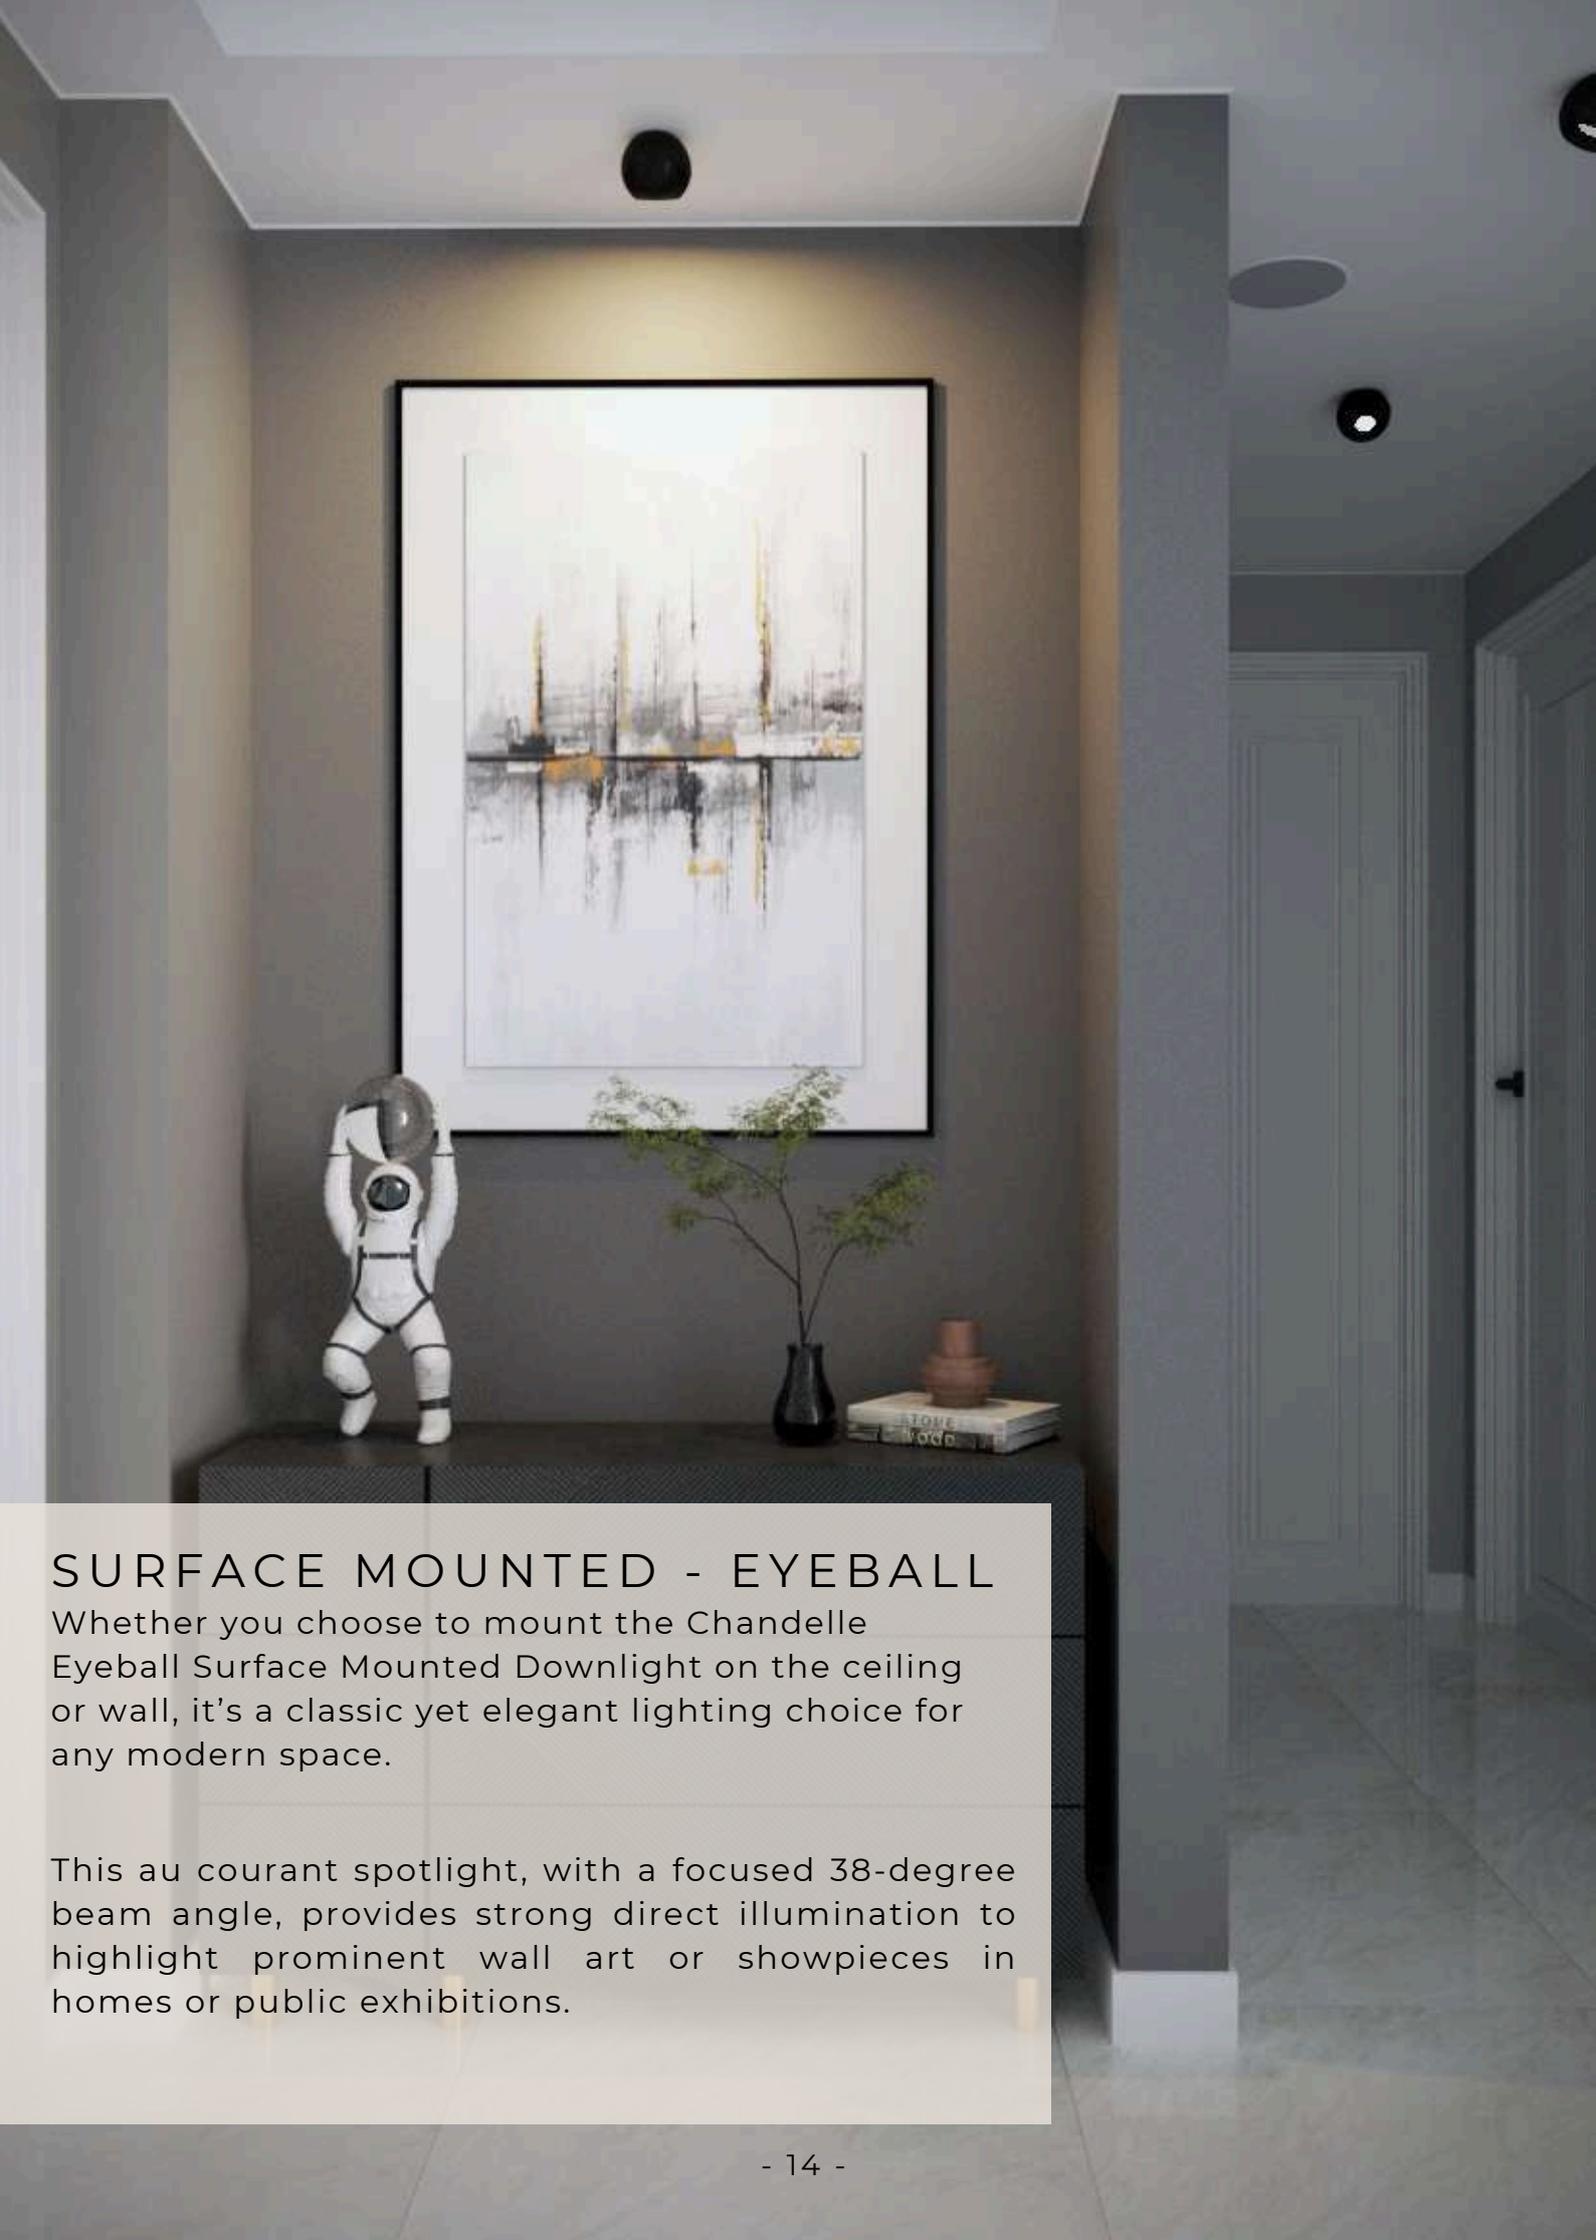

SURFACE MOUNTED - EYEBALL

Whether you choose to mount the Chandelle Eyeball Surface Mounted Downlight on the ceiling or wall, it's a classic yet elegant lighting choice for any modern space.

This au courant spotlight, with a focused 38-degree beam angle, provides strong direct illumination to highlight prominent wall art or showpieces in homes or public exhibitions.

SURFACE MOUNTED EYEBALL



EYEBALL — WHITE

POWER: 12 W (TRIAC DIMMING)
VOLATAGE: AC100-240V
LUMEN: 900LM
LIGHT COLOUR: WARM WHITE
BEAM ANGLE: 38
MATERIAL: ALUMINIUM
DIMENSION: D110 X 82.5MM



EYEBALL — BLACK

POWER: 12 W (TRIAC DIMMING)
VOLATAGE: AC100-240V
LUMEN: 900LM
LIGHT COLOUR: WARM WHITE
BEAM ANGLE: 38
MATERIAL: ALUMINIUM
DIMENSION: D110 X 82.5MM



CHANDELLE
RING





CHANDELLE RING

The Chandelle Ring surface-mounted luminaire blends modern design with classic elegance.

Available in sleek black or pristine white with luxurious gold accents, its circular silhouette and soft illumination, accented by a recessed gold trim, evoke the opulence of

Roman palaces. Perfect for sophisticated settings, elevate your space with this timeless piece.

CHANDELLE RING



SPECIFICATIONS

POWER: 10W

VOLTAGE: AC220-240V, 50/60HZ

LUMEN: 80LM/W

LIGHT COLOUR: COOL WHITE, DAY LIGHT, WARM WHITE

MATERIAL: ALUMINIUM

HOUSING OPTION: BLACK WITH BLACK RIM, WHITE WITH WHITE RIM, BLACK WITH GOLD RIM, WHITE WITH GOLD RIM

DIMENSION: Ø100 X 100MM

IP RATING: IP20

CONIC
TRACKLIGHT



C O N I C T R A C K L I G H T

The Chandelle LED Conical Tracklight features a striking conical design with an adjustable head and base, offering up to 355 degrees of rotation. Its dimmable functionality and varying beam angles provide versatile lighting options.

Highly energy-efficient, it delivers strong illumination with low power consumption. Crafted from lightweight, durable aluminium, it ensures excellent heat dissipation, ideal for residential and commercial use.



TRACK LIGHT CONIC



SPECIFICATIONS

POWER: 6W

VOLTAGE: AC220-240V

LUMEN: >360LM

BEAM ANGLE: 11°/ 22°/ 63°

MATERIAL: ALUMINIUM

HOUSING OPTION: BLACK/WHITE

DIMENSION: D84 X 131 X 17MM

VELO TRACKLIGHT



Chandelle™
LED Tracklight - 1x1x3
Power: 12W
Voltage: AC220-240V
CEC: Trackstar T104 (1800)
Dimensions: 82x110x100mm
Production: 5/2012



VELO TRACKLIGHT

Whether you choose to mount the Chandelle™ Eyeball Surface Mounted Downlight on the ceiling or wall, it's a classic but elegant lighting choice for any modern space.

This au courant spotlight with a focused 38-degree beam angle provides a strong direct illumination to highlight prominent wall art or showpieces in homes or public exhibitions.

VELO TRACKLIGHT



SPECIFICATIONS

POWER: 5W

VOLTAGE: AC220-240V

LUMEN: 100LM

LIGHT COLOUR: COOL WHITE, DAY LIGHT, WARM WHITE (DIMMABLE WITH TUYA APP)

MATERIAL: ALUMINIUM

HOUSING OPTION: BLACK WITH BLACK INNER, WHITE WITH BLACK INNER

BEAM ANGLE: ADJUSTABLE BEAM ANGLE 10°- 50°

DIMENSION: Ø73X 104 MM

IP RATING: IP20 (NON-WATERPROOF)

LUXE+
LIGHTS





LUXE + LIGHTS

Whether you choose to install the Luxe™ Lights in your home or office, they offer a versatile and stylish lighting solution for any modern space. Available in housing options of White, Black, and Gold, with matching module colors, these lights provide a customizable aesthetic.


Perfect for enhancing any interior, the Luxe™ Lights deliver focused and adjustable illumination, making them ideal for highlighting artwork, architectural features, or simply providing ambient lighting in sophisticated settings.

LUXE+ LIGHT

TRIM HOUSING - DOUBLE




DIMENSION: 108.5 X 64 X 55.5MM
CUT HOLE: 100 X 55 MM
HOUSING OPTION: WHITE FRAME
MATERIAL: DIE CASTING ALUMINIUM + POM



TRIM HOUSING - TRIPLE




DIMENSION: 153 X 64 X 55.5MM
CUTHOLE: 114 X 55 MM
HOUSING OPTION: WHITE FRAME
MATERIAL: DIE CASTING ALUMINIUM + POM



TRIM HOUSING - QUADRUPLE



DIMENSION: 197.5 X 64 X 55.5MM
CUTHOLE: 189 X 55 MM
HOUSING OPTION: WHITE FRAME
MATERIAL: DIE CASTING ALUMINIUM + POM



TRIMLESS HOUSING



DIMENSION: 64 X 64 X 55.5MM
CUTHOLE: 54 X 54 MM
HOUSING OPTION: WHITE FRAME

DOUBLE HEAD


DIMENSION: 97.1 X 52.6 X 55.5MM
CUTHOLE SIZE: 54 X 54MM

TRIPLE HEAD

DIMENSION: 141.6 X 52.6 X 55.5MM
CUTOUT SIZE: 143 X 54MM

QUADRUPLE HEAD


DIMENSION: 186.1 X 52.6 X 55.5MM
CUTOUT SIZE: 187 X 54MM

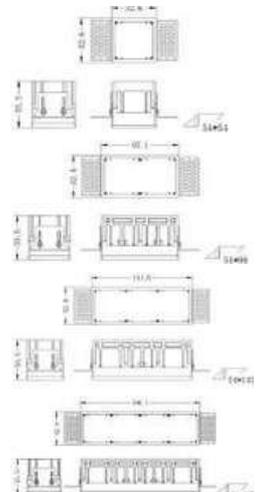

LUXE+ LIGHT




LUXE - A




POWER: 5W **DIMENSION:** Ø44.3 X 44.3 X 55 MM **HOUSING OPTION:** WHITE CASING
MATERIAL: DIE CASTING ALUMINIUM + PC




LUXE - C



POWER: 5W
DIMENSION: Ø44.3 X 44.3 X 80.3 MM
HOUSING OPTION: WHITE CASING
MATERIAL: DIE CASTING ALUMINIUM + PC

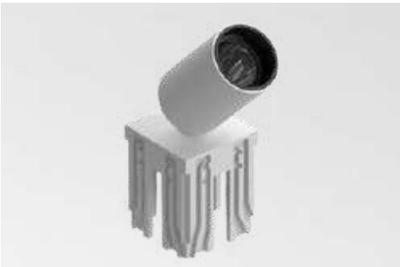

LUXE - G



POWER: 5W
DIMENSION: Ø44.3 X 44.3 X 62.5 MM
HOUSING OPTION: WHITE CASING
MATERIAL: DIE CASTING ALUMINIUM + PC




LUXE - I




POWER: 5W **DIMENSION:** Ø44.3 X 44.3 X 63 MM **HOUSING OPTION:** WHITE CASING
MATERIAL: DIE CASTING ALUMINIUM + PC



LUXE - J




POWER: 5W **DIMENSION:** Ø44.3 X 44.3 X 55 MM **HOUSING OPTION:** WHITE CASING
MATERIAL: DIE CASTING ALUMINIUM + PC

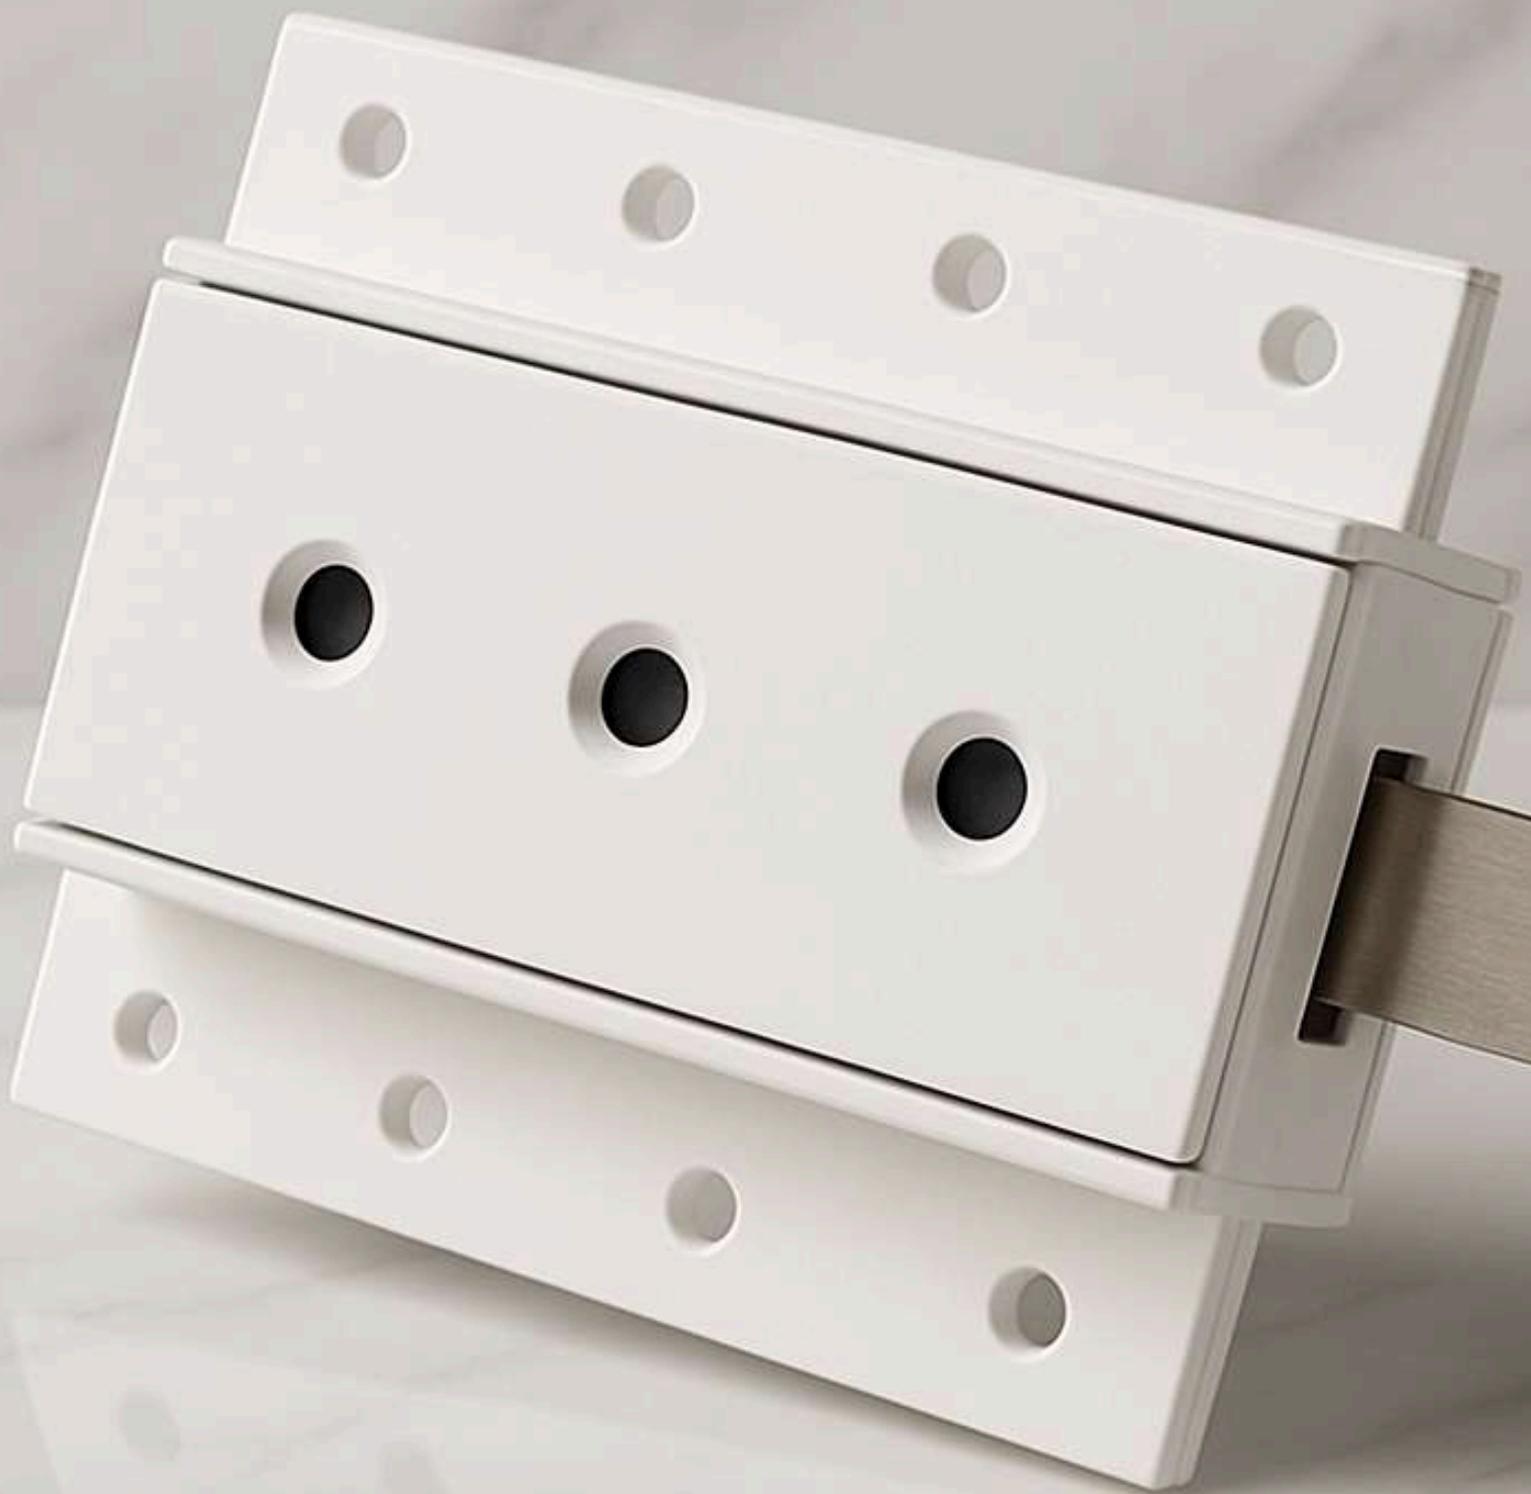

LUXORA INTEGRATED

TRIMLESS VERSION

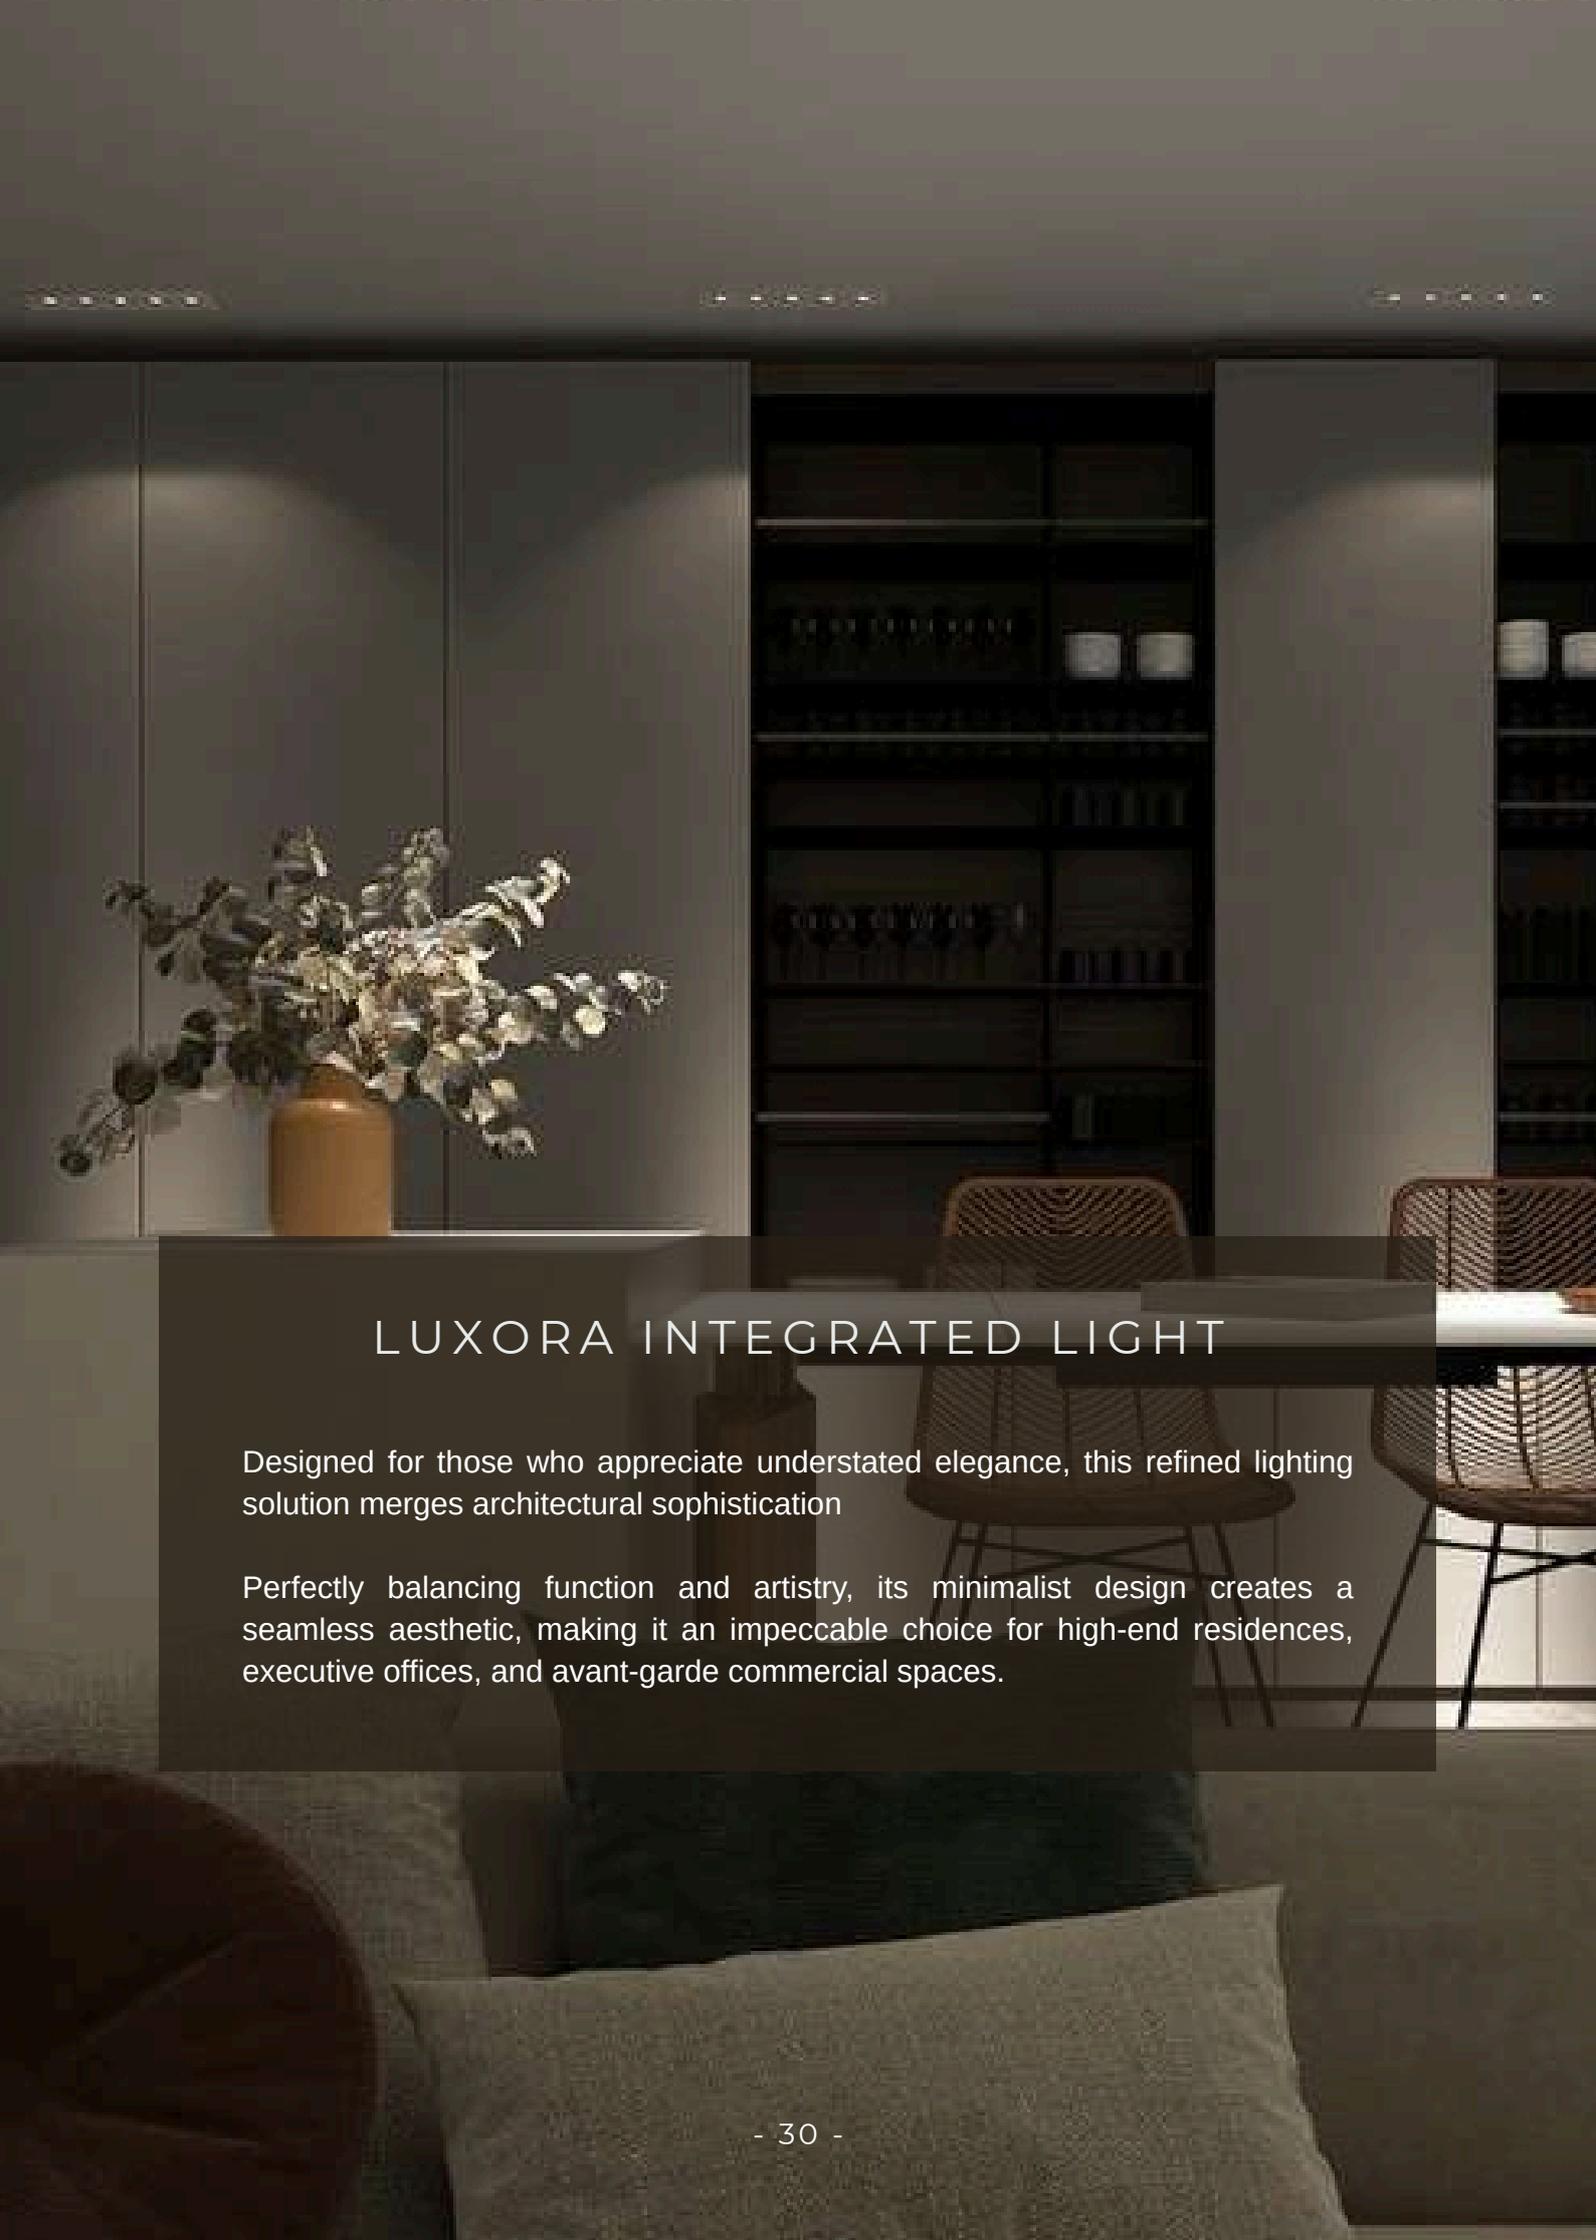


LUXORA INTEGRATED LIGHT

Designed for those who appreciate understated elegance, this refined lighting solution merges architectural sophistication

Perfectly balancing function and artistry, its minimalist design creates a seamless aesthetic, making it an impeccable choice for high-end residences, executive offices, and avant-garde commercial spaces.

LUXORA INTEGRATED

TRIMLESS VERSION

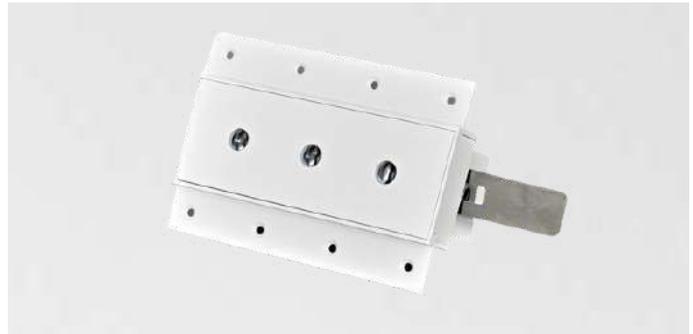

SPECIFICATIONS

POWER: 2W / Hole

VOLTAGE: AC220 / 50Hz

CCT: 2700 - 5000K

MATERIAL: ALUMINIUM

HOUSING OPTION: (1/3/5 HOLE)

COLOUR: WHITE


BEAM ANGLE: 30°

DIMENSION: Ø40x43x(43/100/162) MM



LUXORA INTEGRATED

TRIM VERSION

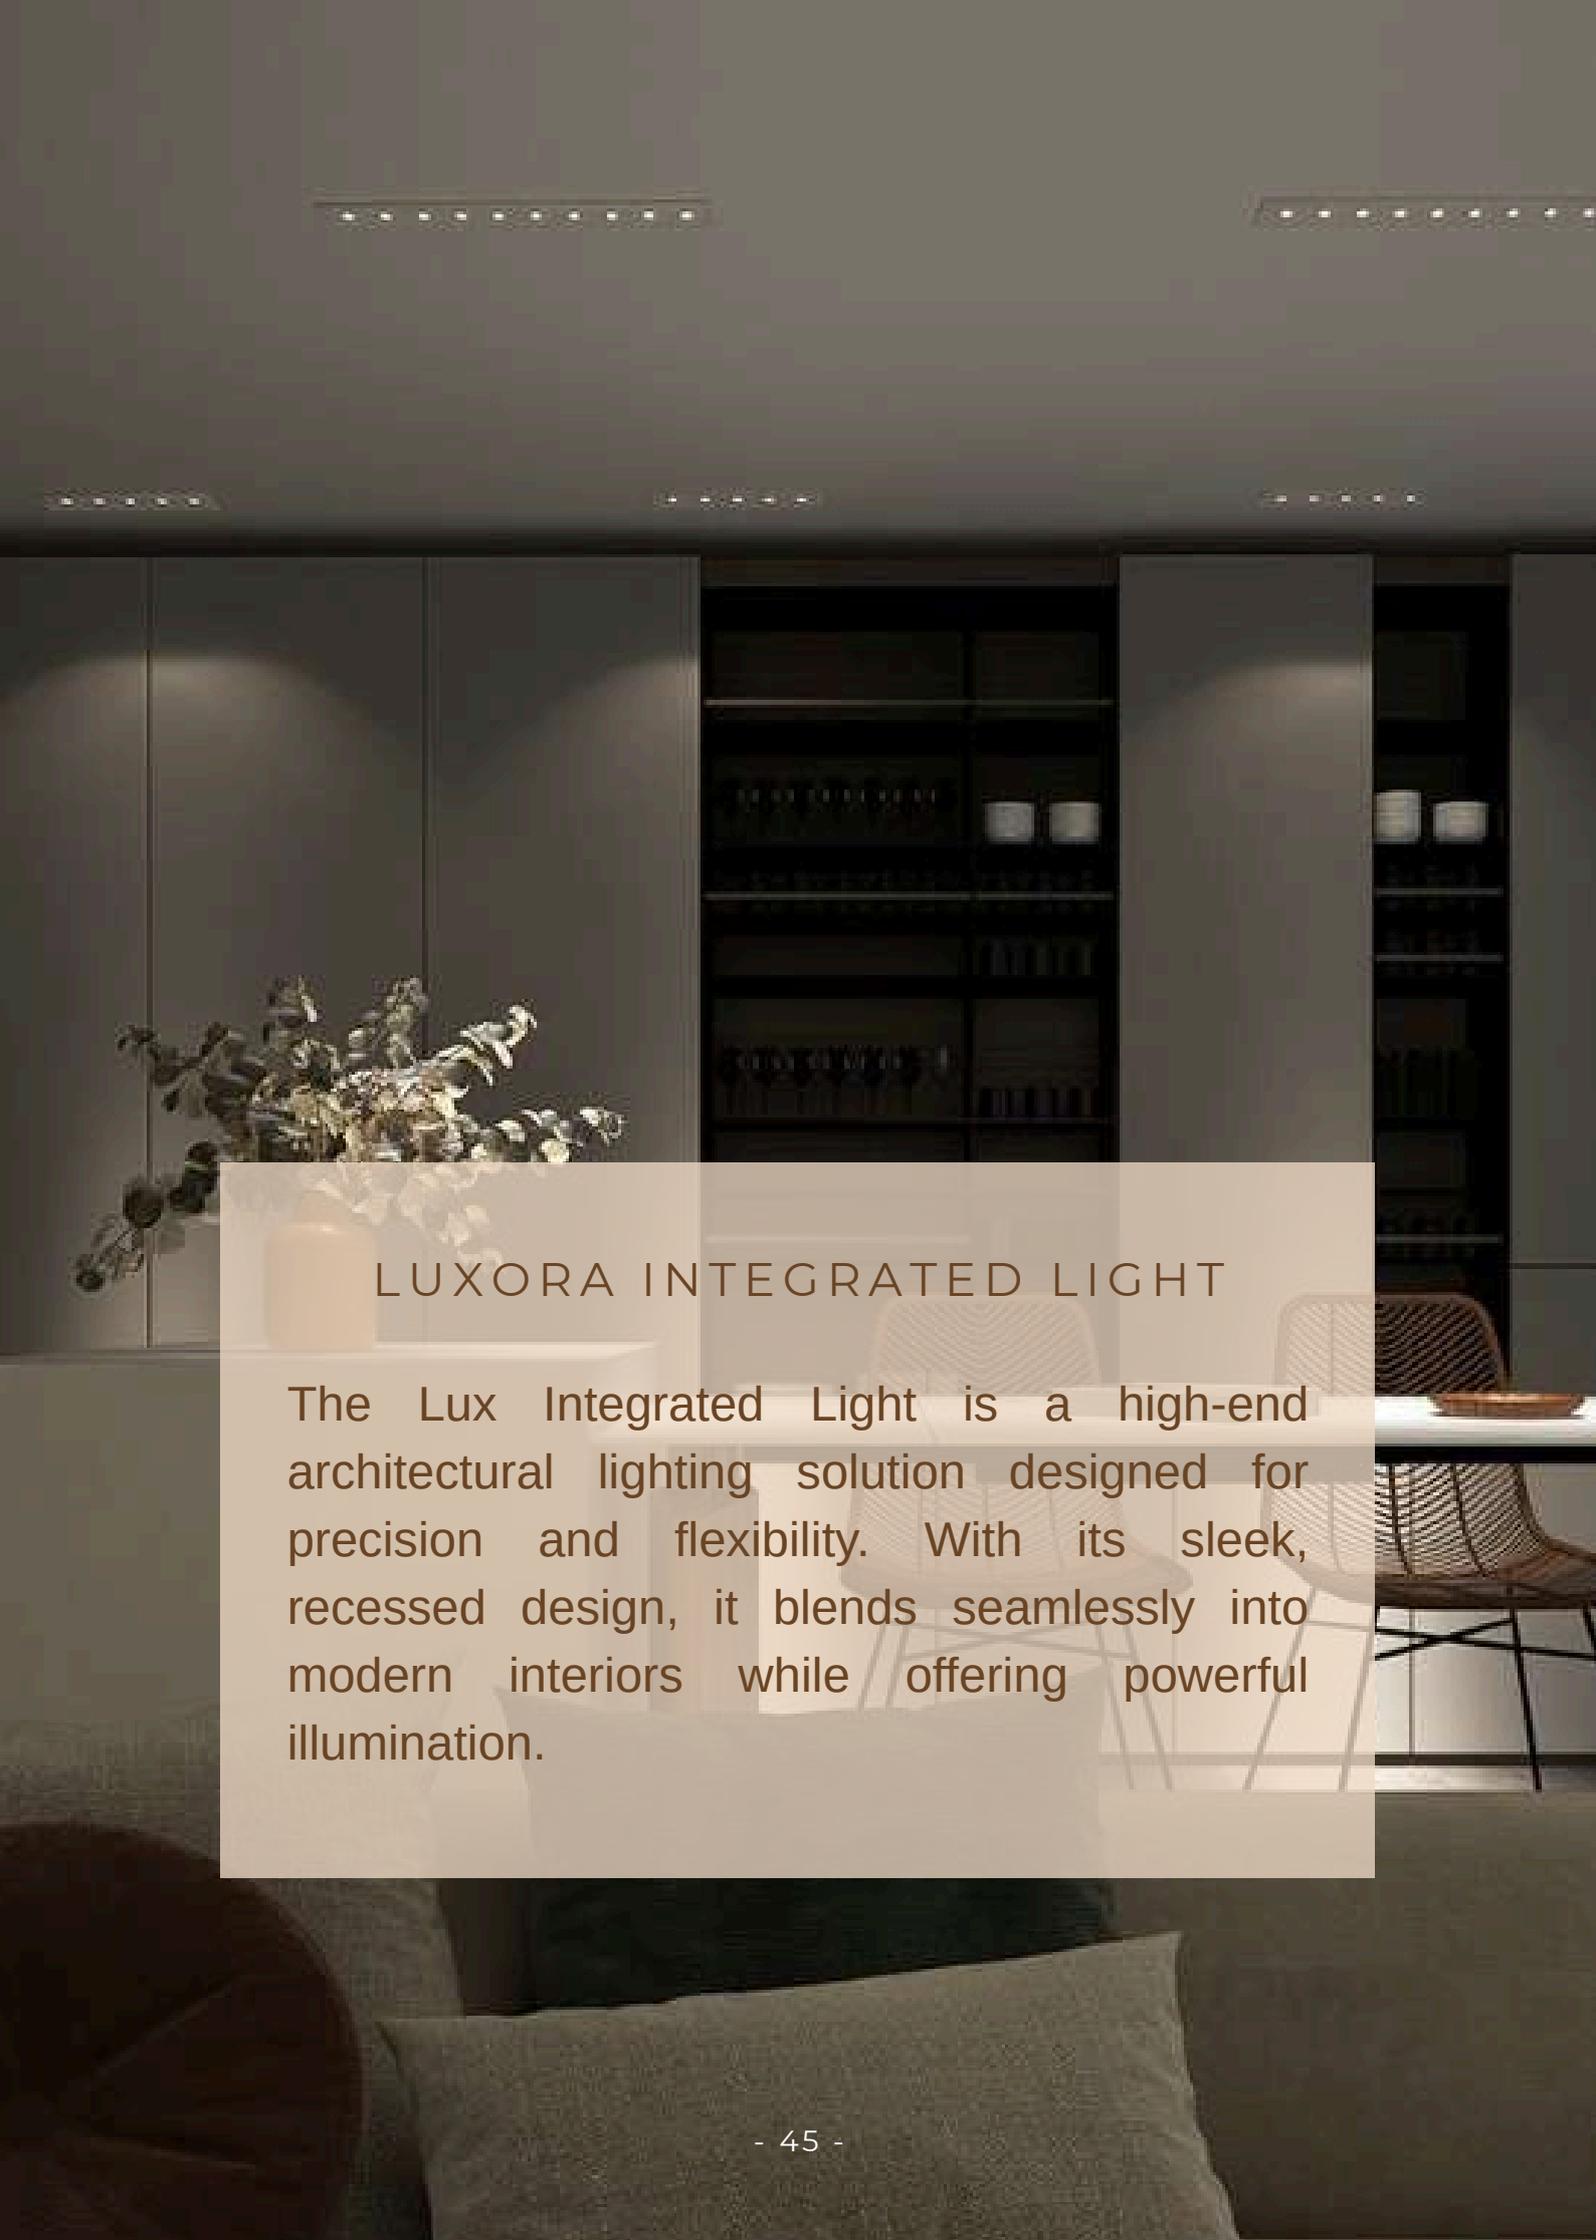A modern interior featuring dark, minimalist cabinetry with integrated lighting. The lighting is recessed into the ceiling and the cabinetry, creating a subtle glow. In the foreground, there is a white table with a vase of greenery and a white chair. In the background, there is a dining table with a wicker chair. The overall atmosphere is sophisticated and contemporary.

LUXORA INTEGRATED LIGHT

The Lux Integrated Light is a high-end architectural lighting solution designed for precision and flexibility. With its sleek, recessed design, it blends seamlessly into modern interiors while offering powerful illumination.

LUXORA INTEGRATED

TRIM VERSION



SPECIFICATIONS

POWER: 2W / hole

VOLTAGE: AC220 / 50Hz


CCT: 2700 - 5000K

MATERIAL: ALUMINIUM

HOUSING OPTION: WHITE (1/3/5 HOLE OPTION)

BEAM ANGLE: 30°

DIMENSION: 40 x 43 x (43 / 100 / 312)

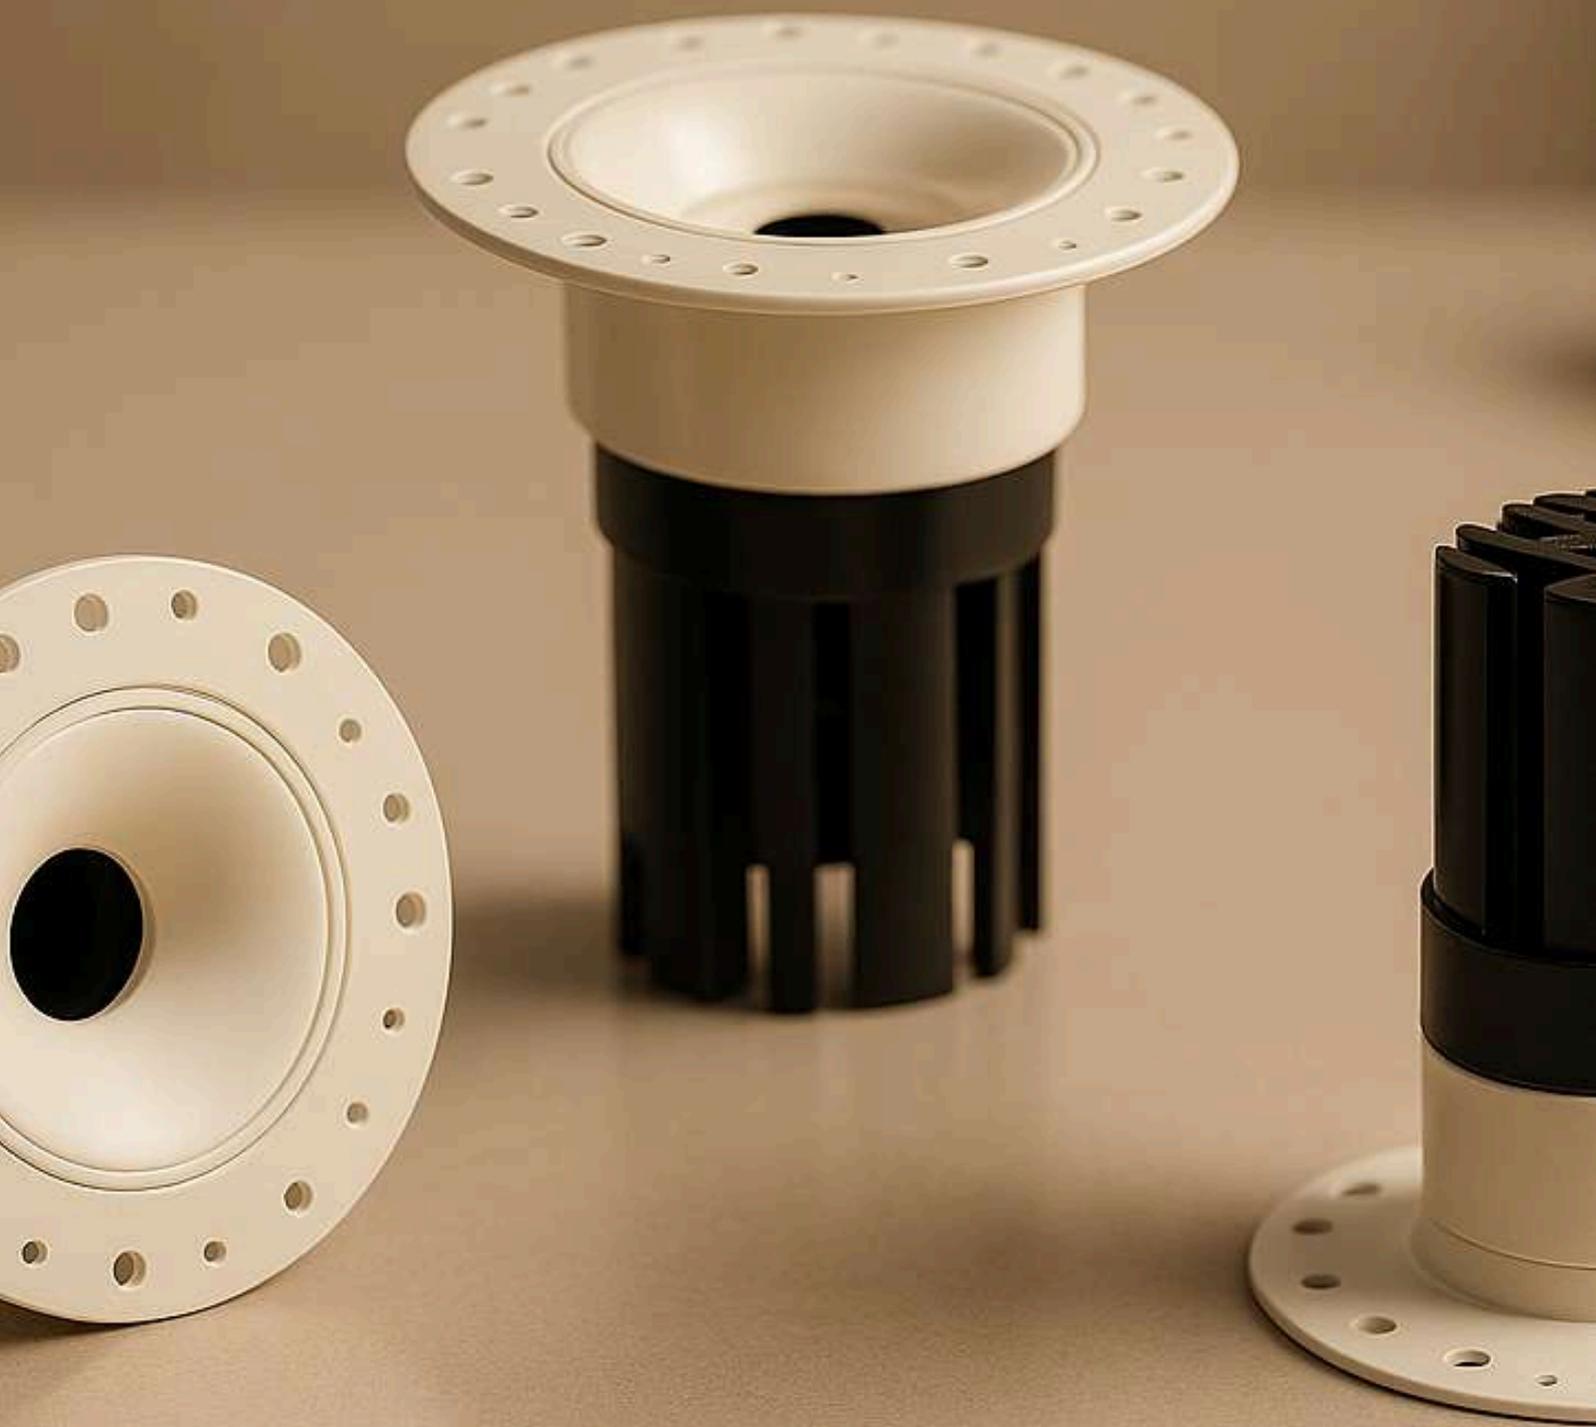

VELAR GLOW
LIGHT

The image shows a close-up of a ceiling with two circular recessed lights. The ceiling is made of wood panels. The lights are illuminated, casting a warm glow. Below the ceiling is a textured wall, possibly plaster or a similar material, which is also illuminated by the lights, creating a soft, ambient light. The overall color palette is warm and brownish-gold.

VELAR GLOW LIGHT

“Velar” conveys concealment and sleek design, offering both direct illumination and an artistic design element enhance your home arsthetic appeal.

We design Velar Glow Downlight, a minimalist and stylish fixture that seamlessly blends into ceilings while providing focused lighting to specific areas..

VELAR GLOW LIGHT



SPECIFICATIONS

VOLTAGE: AC220 / 50 Hz

MATERIAL: ALUMINIUM

HOUSING OPTION: WHITE

BEAM ANGLE: ADJUSTABLE BEAM ANGLE 5° - 50°

POWER: 5 / 9 / 12 W

CCT: 2700-5000K

SIZE: Ø43x72 / 53x84 / 63x89 MM



L U M E É L I T E
L I G H T

LUME ÉLITE LIGHT

The Lume Elite Downlight is a sophisticated lighting solution designed to enhance modern interiors with its sleek design and superior functionality.

Its minimalist design integrates seamlessly into various decor colour and styles, making it a versatile choice for anyone looking to upgrade their lighting system.

LUME ÉLITE LIGHT



SPECIFICATIONS

POWER: 3W

VOLTAGE: AC220 / 50Hz

CCT: 2700 - 5000K

MATERIAL: ALUMINIUM

HOUSING OPTION: BLACK, WHITE, SILVER, AND GOLD

BEAM ANGLE: 24°

DIMENSION: Ø 38X31 MM

NOVA GLIDE LIGHT





NOVA GLIDE LIGHT

The Nova Glide Light is a sleek and adjustable recessed downlight designed for precise illumination, making it ideal for accent and task lighting. Featuring a glide mechanism for flexible angling, it offers superior adaptability for residential and commercial spaces. With multiple reflector finishes, a durable build, and energy-efficient performance, it seamlessly combines functionality with modern aesthetics to enhance any interior.

NOVA GLIDE LIGHT



WHITE MATTE



WHITE GLOSSY



ROSE GOLD



GOLD



BLACK

SPECIFICATIONS

POWER: 8-24W

VOLTAGE: AC220-50Hz

CCT: 2700 - 5000K


MATERIAL: ALUMINIUM

HOUSING OPTION: BLACK, WHITE GLOSSY, WHITE MATTE, ROSE GOLD, AND GOLD

BEAM ANGLE: 15/ 24/ 36/ 55°

DIMENSION: Ø110X88 / Ø110X115/ Ø145X98/ Ø145X124/ Ø172X116/ Ø110X143 MM

CUTOUT: Ø60/ Ø80/ Ø100

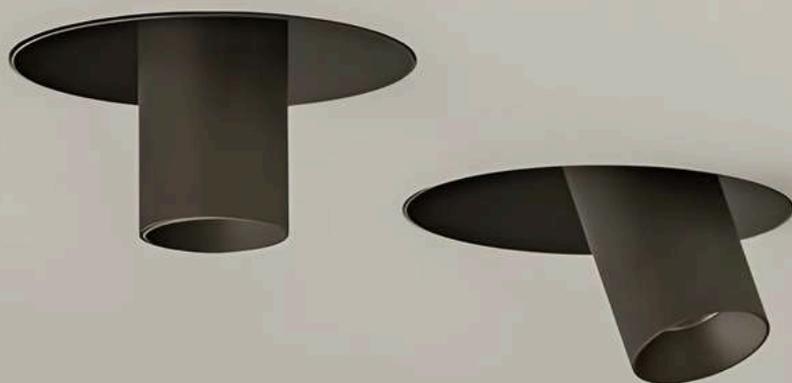

MINI
TELESCOPIC




MINI TELESCOPIC

The Mini Telescopic light is a next-generation architectural downlight designed to offer enhanced flexibility, superior focus, and elevated aesthetics. A retractable cylindrical body that allows directional lighting without compromising on visual neatness.



MINI TELESCOPIC

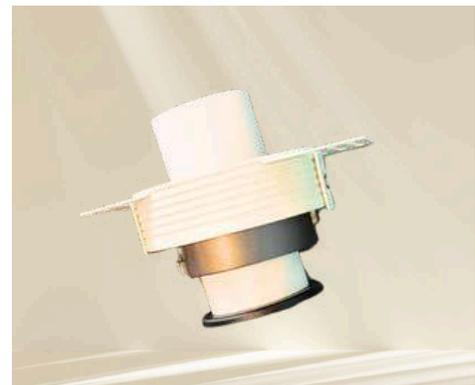

SPECIFICATIONS

POWER: 8W

VOLTAGE: DC185-265V


CCT: 2700/ 3000/ 4000/ 6500K

BEAM ANGLE: 15/ 24/ 36°

DIMENSION: Ø85 x H115 mm


CUT SIZE : 75 mm

LUNE
BRILLANTE
2025

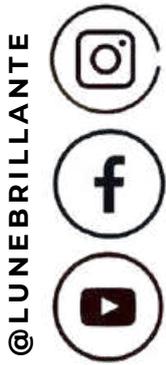


CONTACT

531 Upper Cross Street 03-02
Hong Lim Complex, S(050531)
+65 9191 7560
@lunebrillante
<https://lunebrillante.sg>

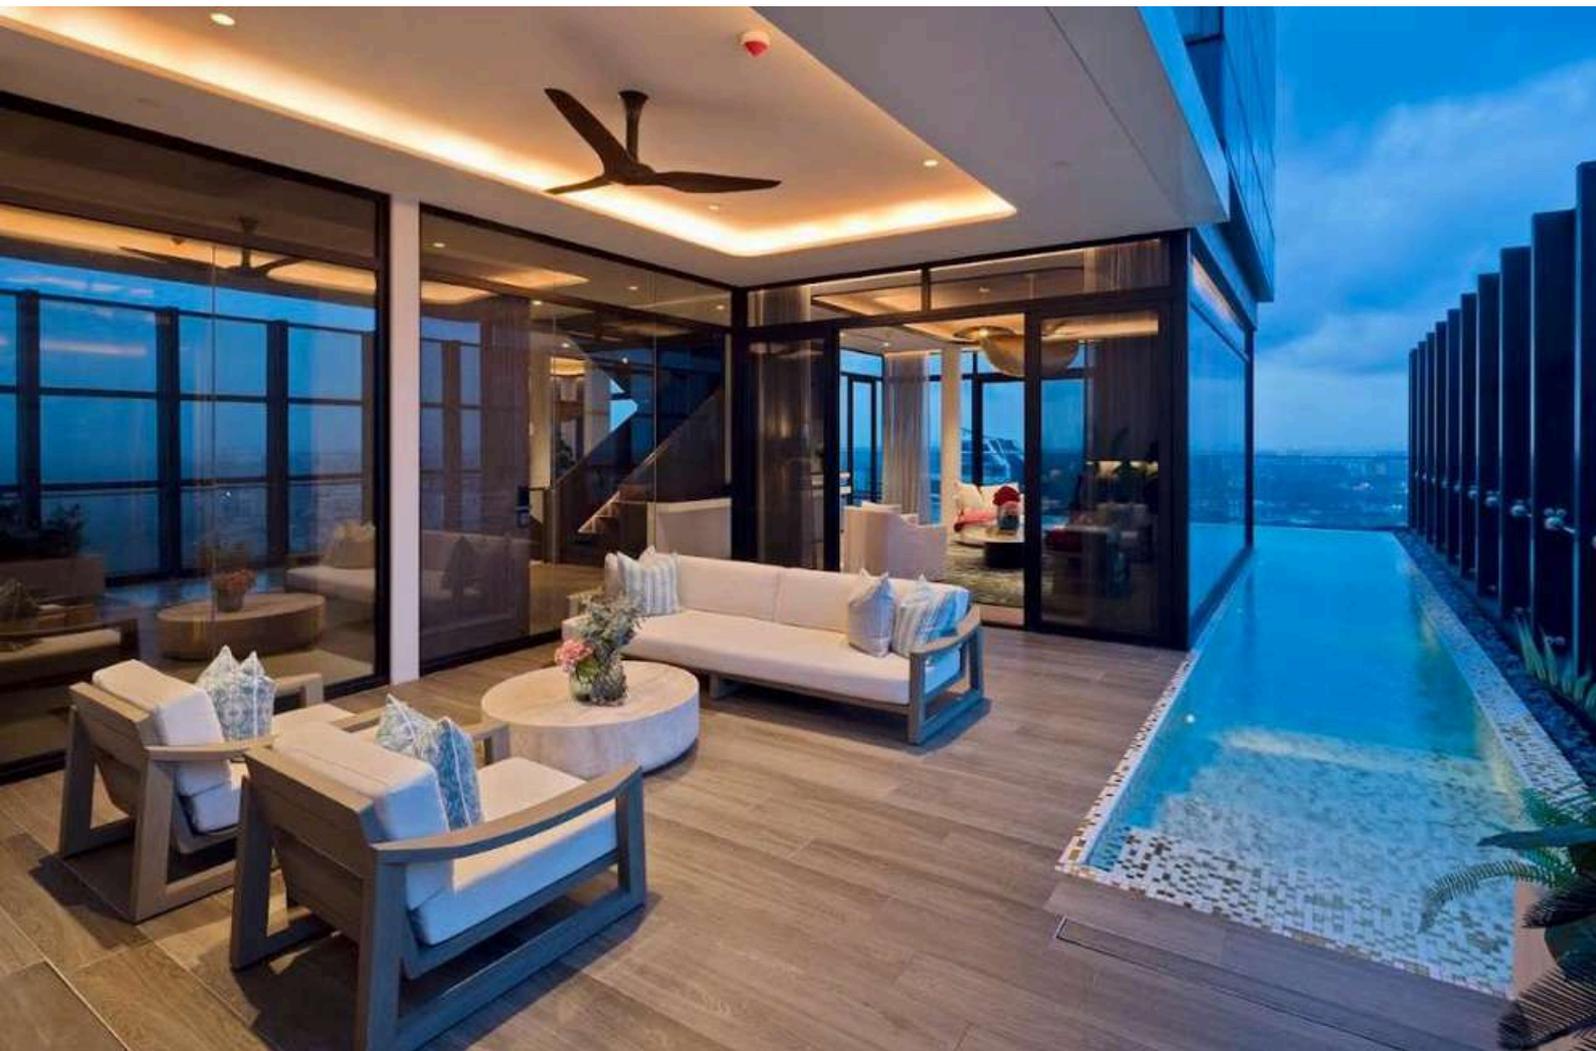


ASTRA
TELESCOPIC

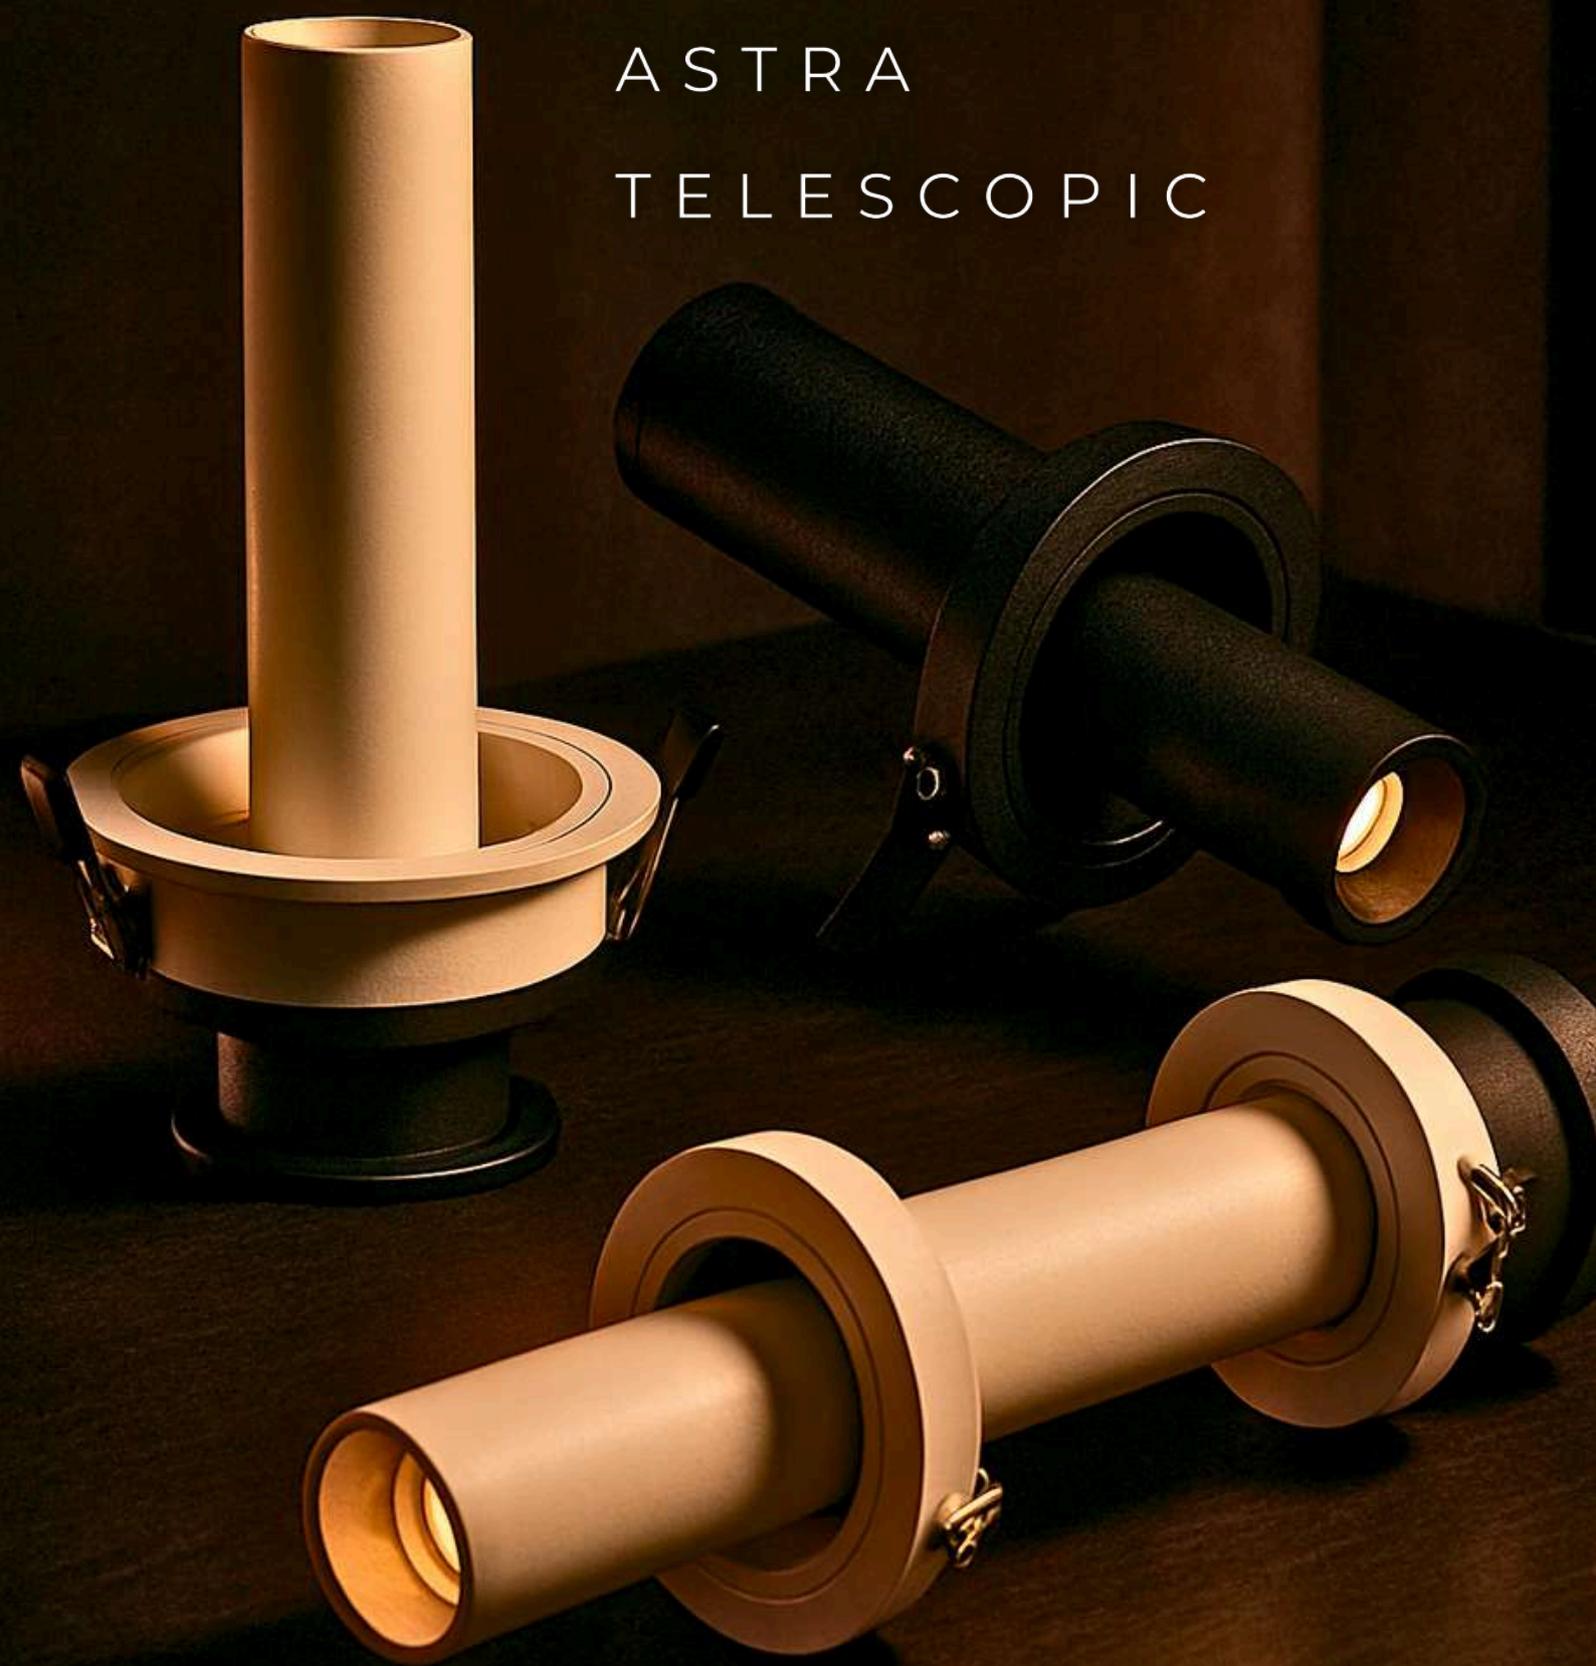

ASTRA TELESCOPIC

The Astra Telescopic Downlight is a versatile lighting with its 360-degree rotation capability.

We offers unparalleled flexibility, adjustable beam light feature enables customization of the light spread, ensuring optimal illumination for any setting.

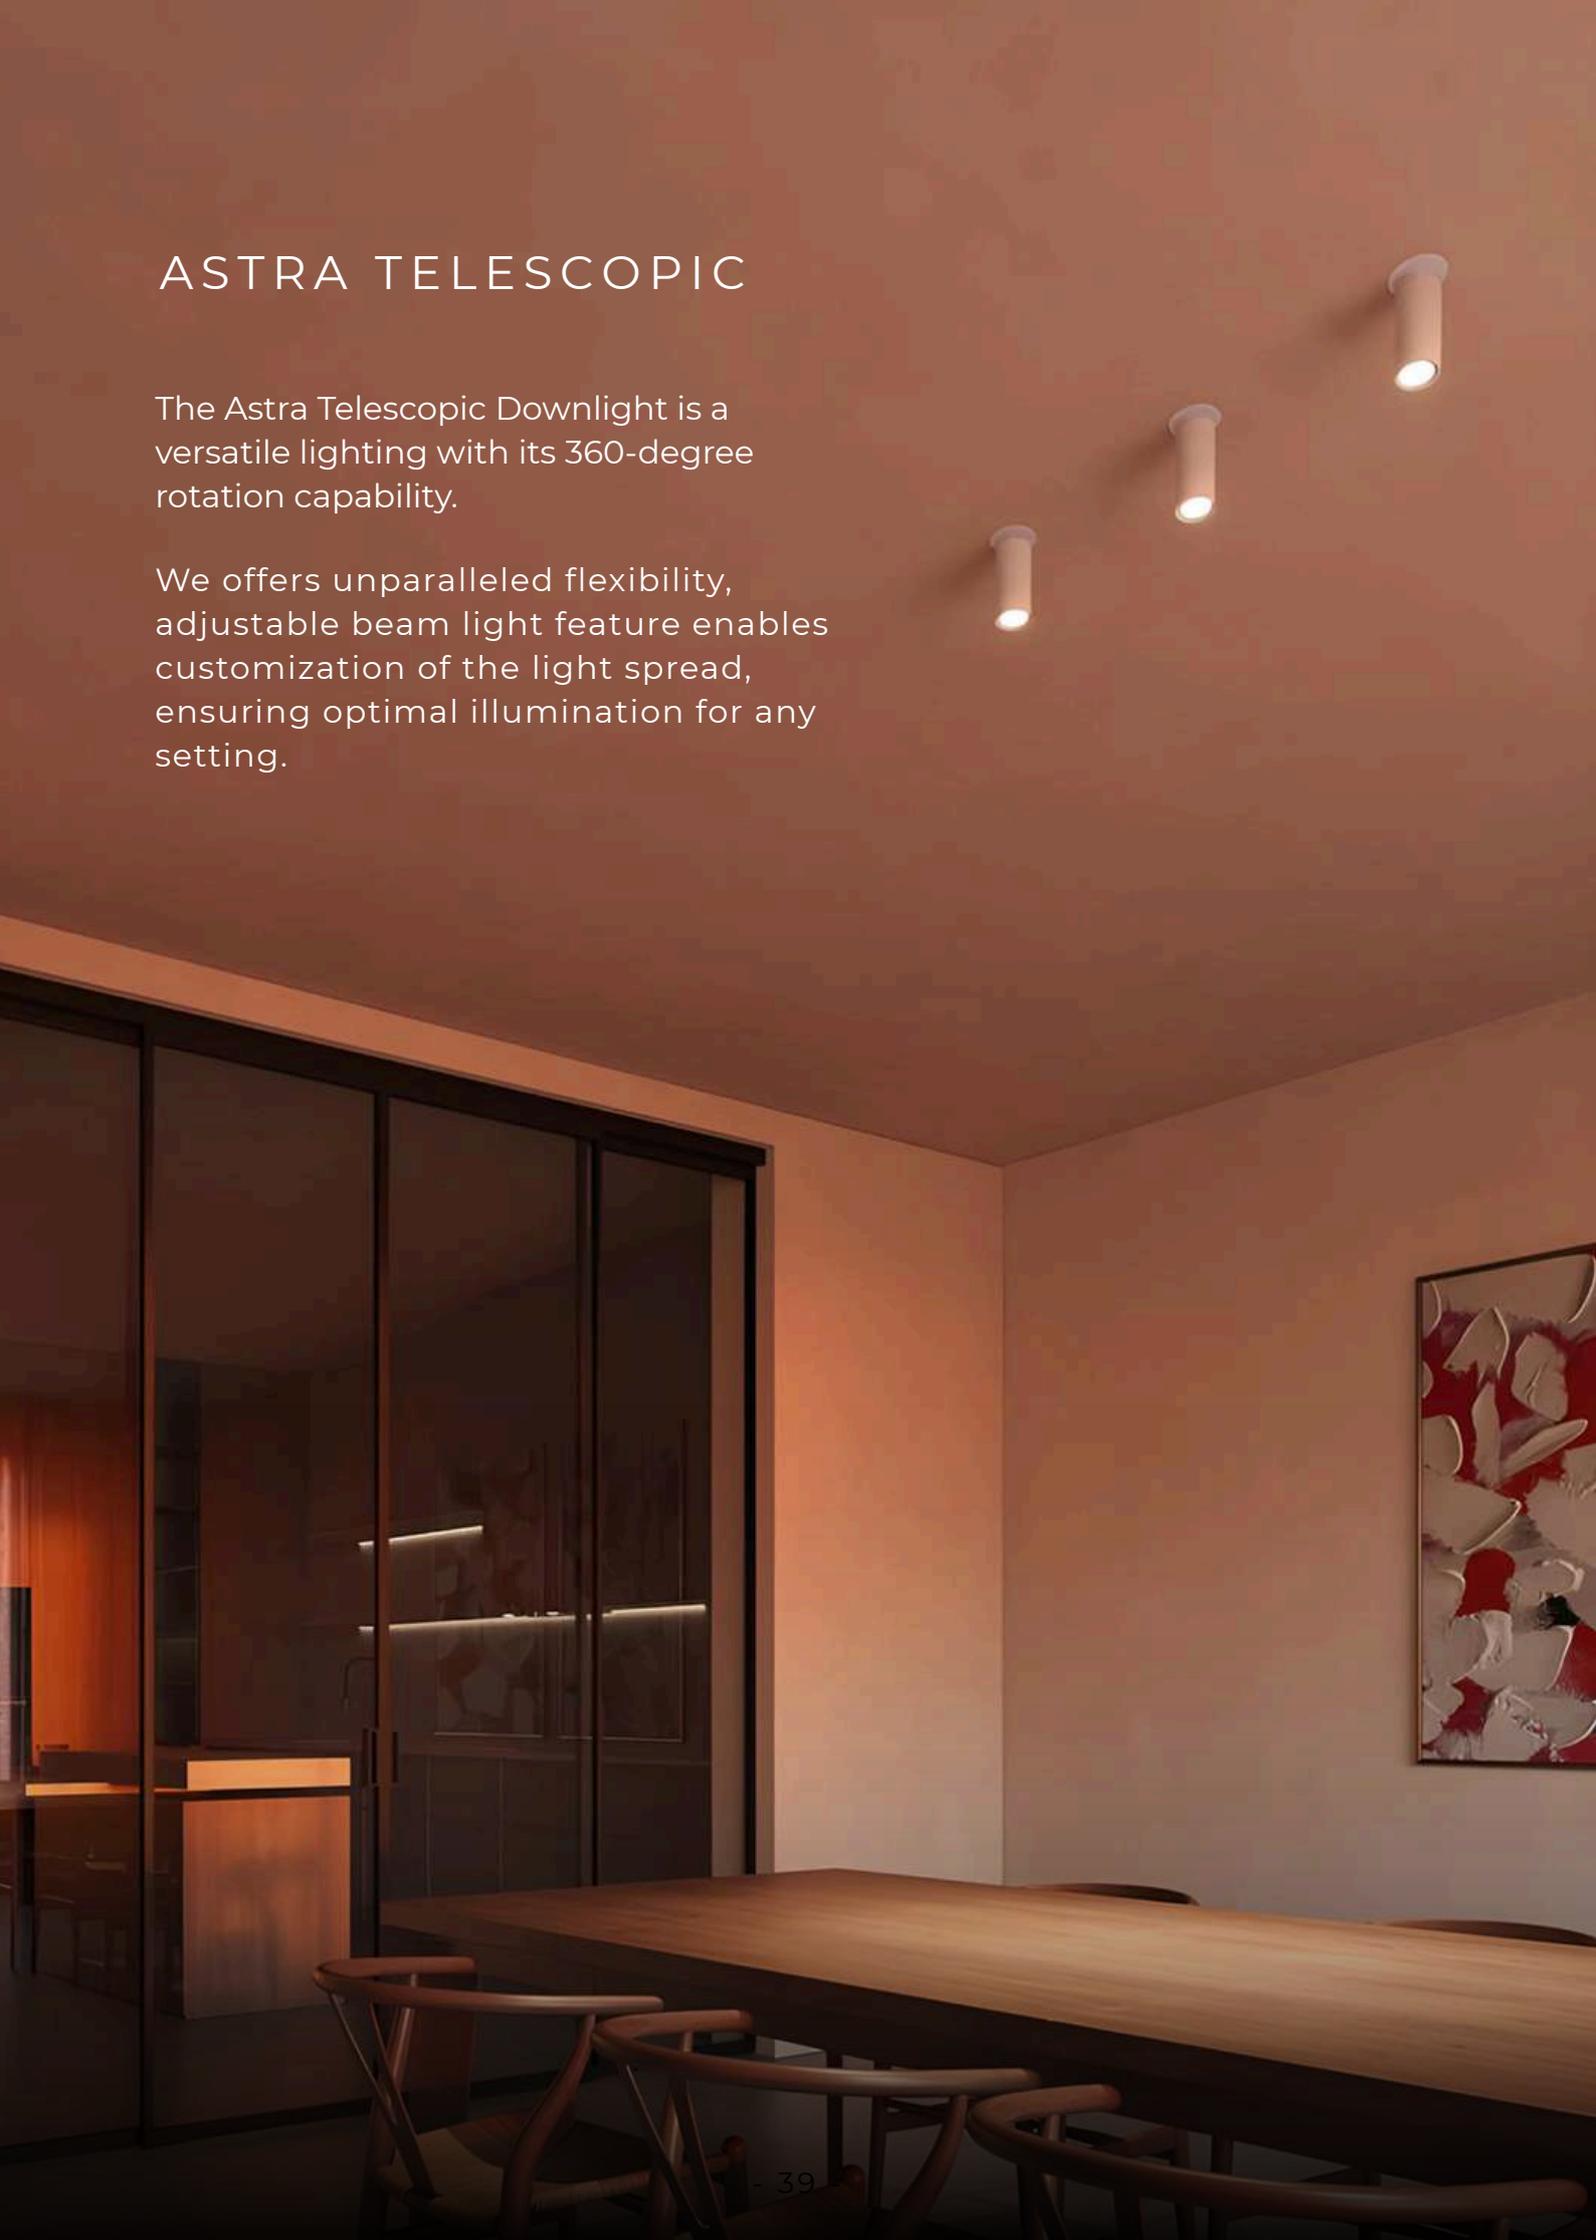

ASTRA TELESCOPIC LIGHT



PRODUCT TYPE	NAME	POWER	HOLE	SIZE
	AT - NOVA	5W	75mm	Ø38X31 MM
	AT - ORBIT	5-7W	75m	Ø38X31 MM
	AT - PULSAR	10-12W	75m	Ø38X31 MM